



---




# LED PANEL LIGHT LIFUD





Picture Name	LED PANEL 600x600 ceiling lifud driver led
Item No	BR-PL6060-42W-A07
Size	595*595*12mm(600x600x12mm)
Input Voltage	AC100-240V
LEDs	SMD2835
Input Power	42W
Lumen effect	≥100lm/w
LGP	PMMA
efficiency	≥88%
Filler	Fire proof EVA Matt
Power factor	>0.9
Housing color	White
Color rendering index	>80
UGR	<19 / <16
life time	>50,000H
Fixture materia	Aviation AL6063
SDCM	<3
CCT	5000/6000K±250K
Protection grade	IP20/IP40
Storage Temperature	-40°+80°C
Working Temperature	-20°+45°C
Net Weight	4kg
Installation Methods:	Recessed / Suspended / Wall Mounted / Ceiling Mounted
Application:	Office, Home / School / Office / Hospital / Hotel / Restaurant
Certification:	CE, EMC, FCC, LVD, RoHS, SAA,ISO9001


# LED PANEL

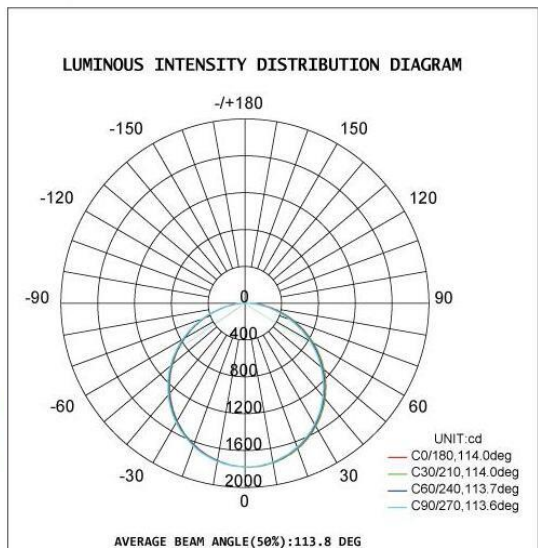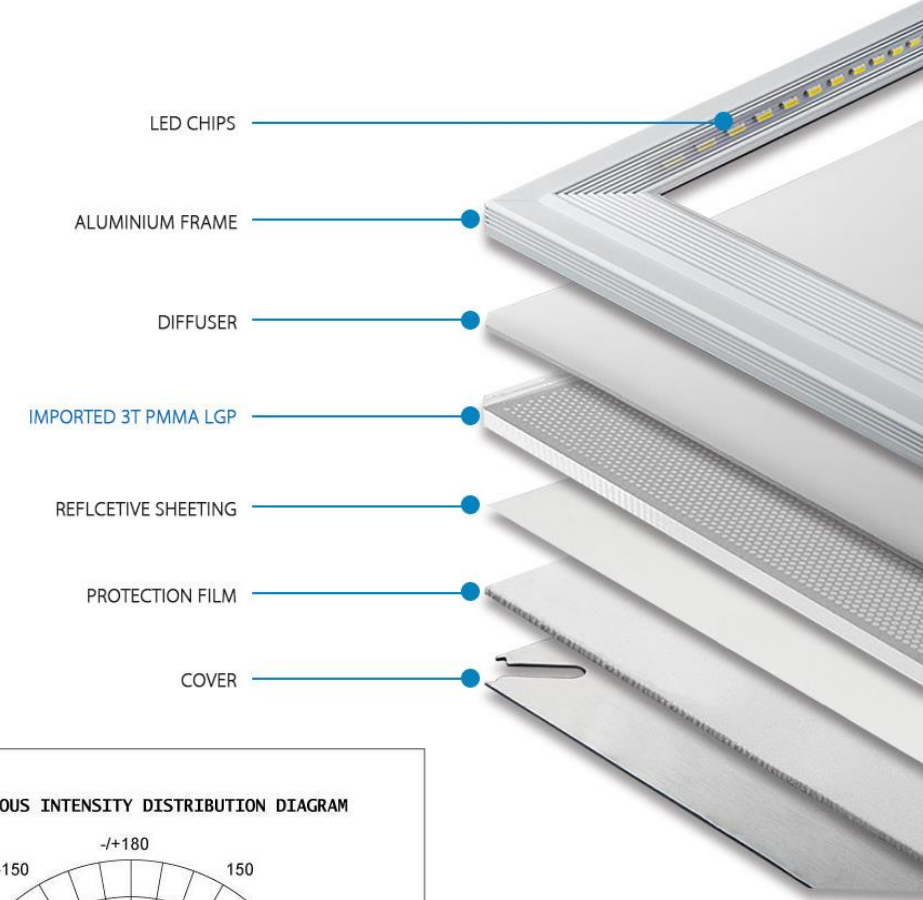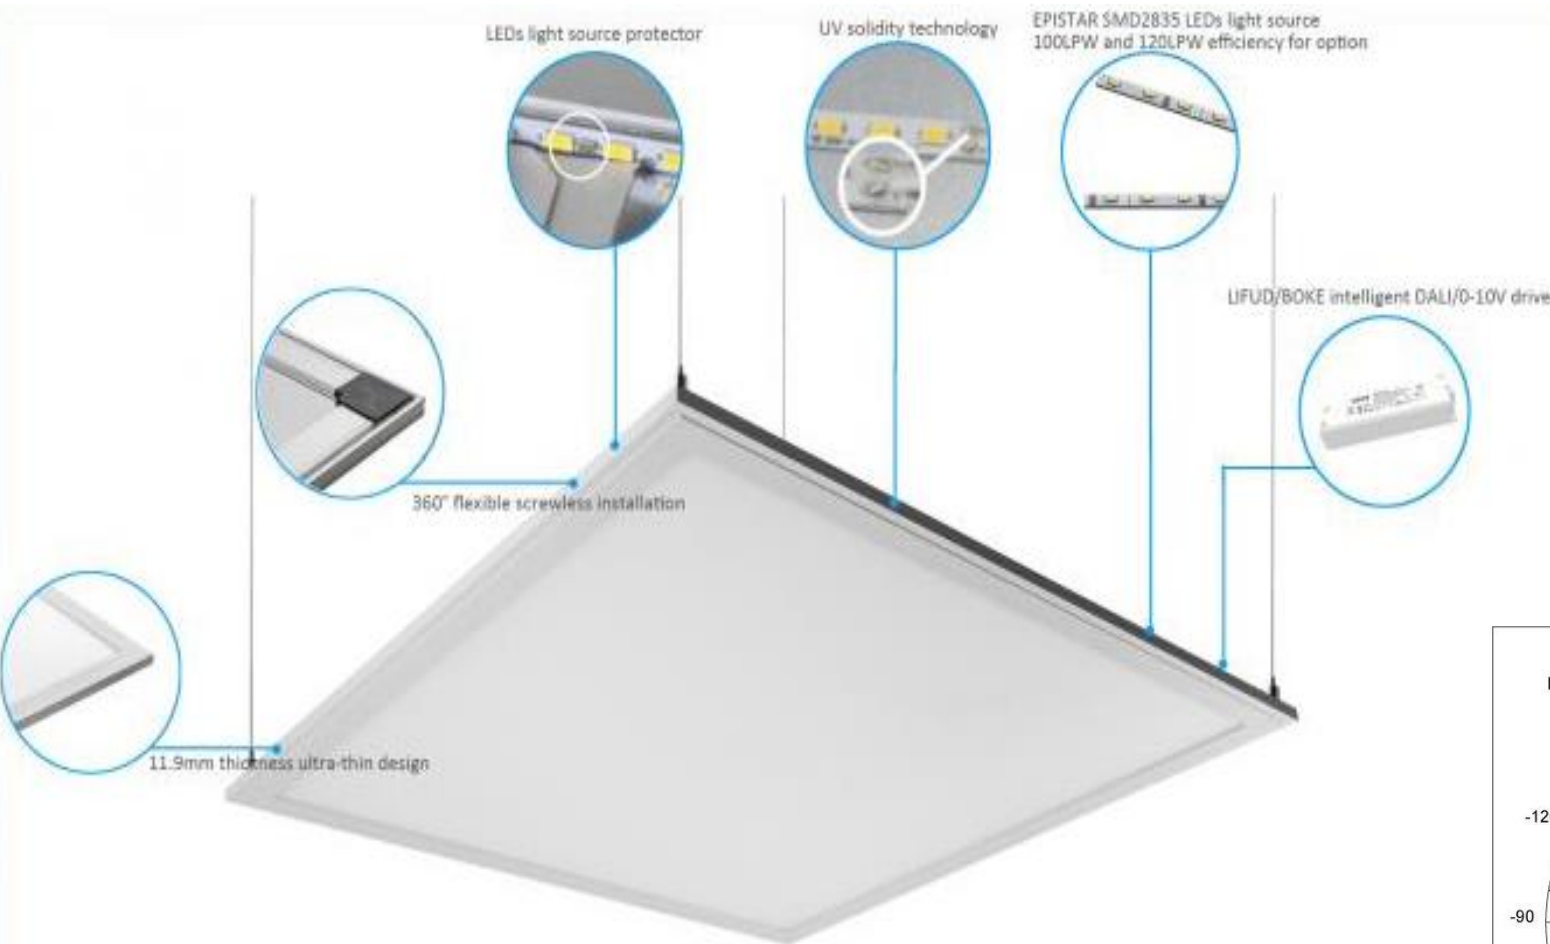

# DRIVER



ITEM No.	LF-GIF040YA
Power	40 watts
Input	220~240volt
Output	33-40 volt
IP ( International Protection )	40
Ampe	0.35A
Certificated	CCC, CE, TDV, ENEC..
Power Factor	>0.9

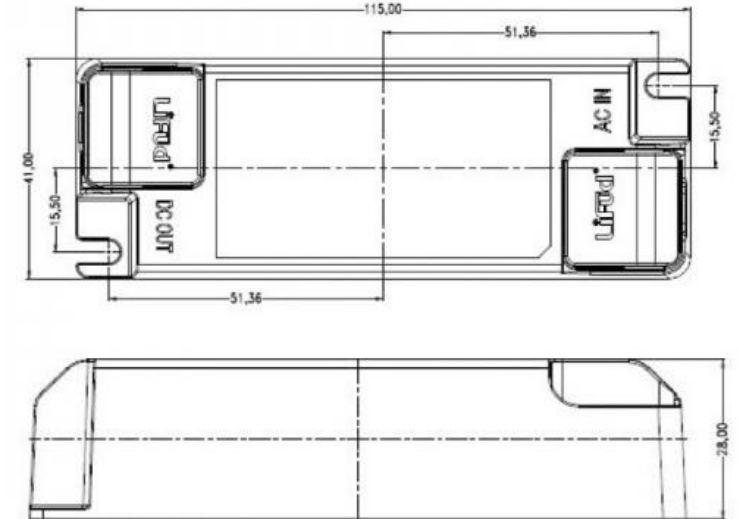

# APPLYCATION



office



Meeting room



Shop



Hospital



**S G L**  
**LedLightingTechnology**